



new

LANFRANCHI

gentle bottle silo

The word identifies the result we wish to obtain with the realization of this new dynamic storage system that has improved our existing storage systems.

The main characteristics of this new storage system are:


- bottle gentle handling
- possibility to store very light bottles
- F.I.F.O. system
- reduced installation times

gentle silo is used mainly as a dynamic buffer on the palletizing and filling lines, or as a bottle cooling system in extruder lines for PET, PP or HDPE containers before being conveyed to big dimension storage silos, reducing the risk of deformation problems. Gentle bottle silo is used even when a preform press, linked directly with a blowing machine, needs to reduce the temperature of the preforms, in this way heating and blowing process are as homogeneous as possible.



MODELOS	A (mm)	B (mm) useful storage height per layer	C 5.000 (mm)	C 10.000 (mm)	C 15.000 (mm)	C 20.000 (mm)	number of layers
GBS 1000	1.000	1.000	5 mc	10 mc	15 mc	20 mc	1-4
GBS 2000	2.000	1.000	10 mc	20 mc	30 mc	40 mc	1-4
GBS 3000	3.000	1.000	15 mc	30 mc	45 mc	60 mc	1-4

to calculate the quantity of bottles that may be stored in a GBS it is necessary to consider the table included in Lanfranchi general catalogue "bottle bulk storage system".

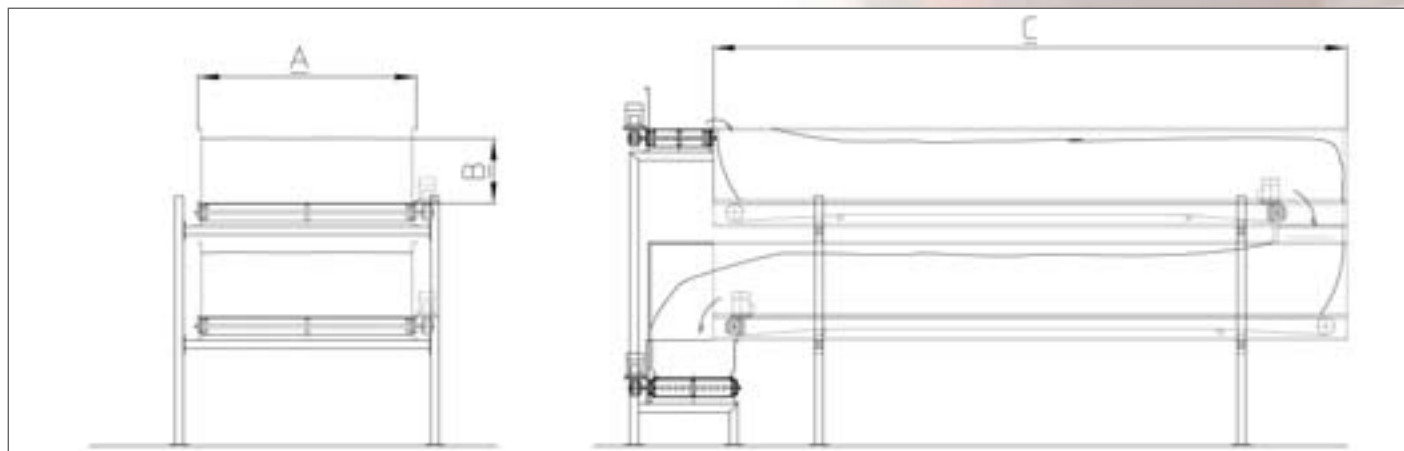

LANFRANCHI - silo light, gentle bottle silo-GB 03/2007

Lanfranchi reserves the right to modify the features of its products without prior notice.



LANFRANCHI

LANFRANCHI S.r.l. • Collecchio (PR) ITALY • Tel. ++39 0521 541011 • Fax ++39 0521 802149 • www.lanfranchi.it • sales@lanfranchi.it
 LANFRANCHI NORD EUROPE • Roubaix FRANCE • Tel. ++33.3.20.68.96.20 • Fax ++33.3.20.68.96.21 • contact@lanfranchi.fr
 LANFRANCHI NORTH AMERICA INC. • Tampa (FL) USA • Tel. ++1 (813) 9015333 • Fax ++1 (813) 9015518 • sales@lanfranchiUSA.com